




# VIBRATORY ROLLER **RCVP**


## STANDARD EQUIPMENT

- 1 Adjustable scraper for drum cleaning
- 2 ± 15° oscillation mechanical self-levelling system
- 3 Silent-blocks to absorb vibrations (6 each side for RCVP 1250-1550, 8 each side for RCVP 1850-2150)

## DESCRIPTION

High performance and powerful **padded Compacting Vibratory Roller** specially suited to work in heavy soils: clay and clay-based backfill roads, pathways and forest tracks. Each U.Emme Compacting Vibratory Roller is equipped with **bidirectional hydraulic motor** with direct transmission thru elastic connection to the rotating shaft. Upon request, every Vibratory Roller models can be set up with **linkage plate shifted from center** towards the right side, to allow the drum to cover the traces of wheels or tracks on the right during the job.

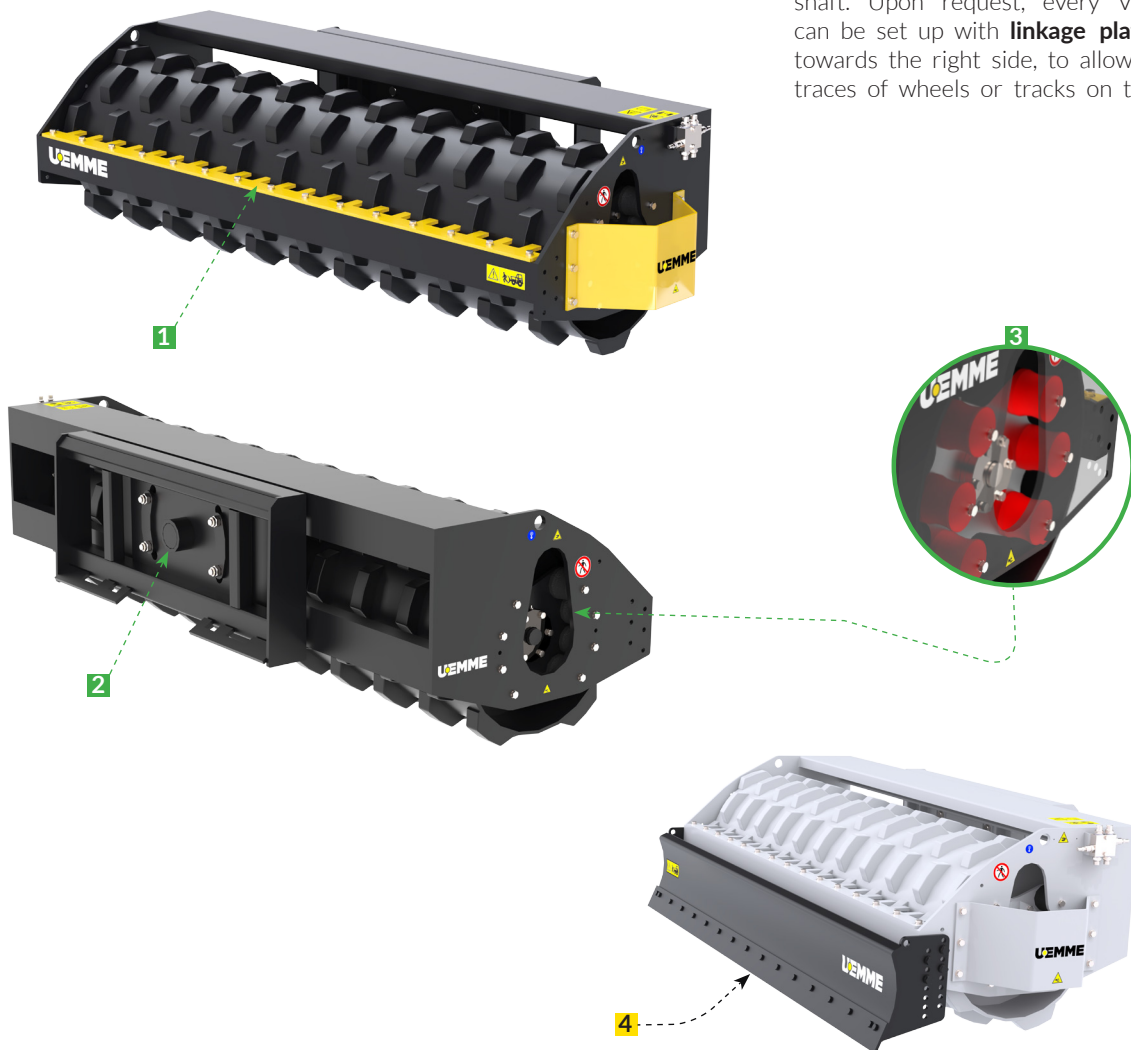

MODELS		RCVP 1250	RCVP 1550	RCVP 1850	RCVP 2150
Working width	mm	1250	1550	1850	2150
Total width	mm	1520	1820	2120	2420
Weight without linkage	Kg	785	910	985	1088
Minimum-maximum vibration frequency	v/1'	2000-3000	2000-3000	2000-3000	2000-3000
Compacting power (at 3000 v/1')	Kgf	3690	3690	3690	3690
Minimum-maximum oil flow	l/1'	35-70	35-70	35-70	35-70
Minimum-maximum pressure	bar	150-210	150-210	150-210	150-210
	Tons	1÷3,5	2÷5,5	3,5÷7	5,5÷9

**OPTIONS**

- 4 Bolted dozer blade adjustable in height

**LINKAGE SYSTEMS**

- Universal linkage for Skid-Steer Loader
- Non universal linkage for Skid-Steer Loader
- Wheel Loaders, Backhoe Loaders and Telehandlers linkage

**APPLICATIONS**

- INDUSTRIAL SECTOR
- BUILDING SECTOR
- AGRICULTURAL SECTOR
- ROAD MAINTENANCE
- BUILDING PLOTS AND RIVER SIDES COMPACTING OPERATIONS

