


STANDARD EQUIPMENT

- 1 Set up for bolted linkage systems
- 2 Transmission belt protection case
- 3 Rotor with retractable hammers (TT HD-S)
- 4 Rotor with fixed teeth (TT HD-F)
- 5 Protection chains on both sides
- 6 Slides with 3 regulations to adjust the cutting height

DESCRIPTION

The U.EMME TT HD Forestry Mulchers are offered in 2 different shaft configurations: TT HD-S serie is equipped as standard with retractable hammers while TT HD-F serie is equipped with fixed teeth. Equipped with a cast iron gear motor and transmission provided by 3 robust and efficient toothed trapezoidal belts. The presence of a special valve block including a priority valve for oil flow regulation, anti-shock and anti-cavitation avoids the need of drainage line connection. Specially designed for use with industrial machines such as Excavators and Backhoe Loaders, each U.Emme TT HD forestry mulchers are ideal for clearing and thinning bush, job made easy by the large symmetrical inlet mouth, and are also effective for milling trunks from 12 to 25 cm in diameter, depending by rotor equipment.

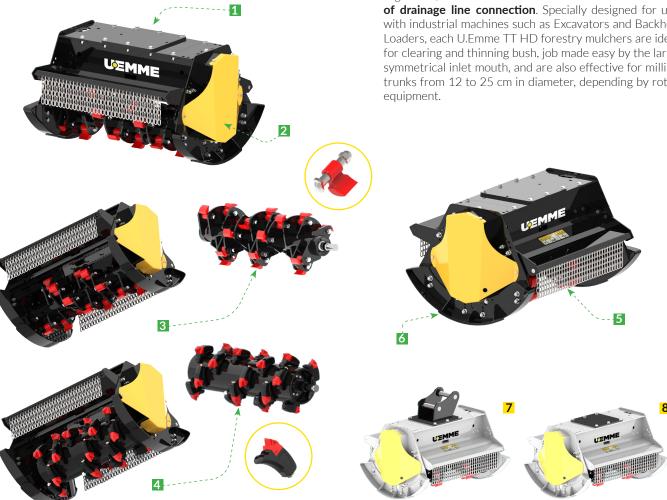



MODELS		TT 70 HD-S	TT 90 HD-S	TT 105 HD-S	TT 70 HD-F	TT 90 HD-F	TT 105 HD-F
Working width	mm	700	900	1050	700	900	1050
Total width	mm	850	1050	1250	850	1050	1250
Height	mm	600	600	600	600	600	600
Weight without linkage	Kg	290	360	400	340	400	460
Displacement / oil flow ratio	cc/lpm	22/40	27/50	44/80	22/40	27/50	44/80
Working pressure	bar	200-220	200-220	200-220	200-220	200-220	200-220
Transmission belts	nr	3	3	3	3	3	3
Hammers / teeth	nr	21	24	30	21	24	30
Maximum shredding Ø	cm	12	12	12	25	25	25
	Tons	5÷7	7÷9	9÷12	5÷7	7÷9	9÷12
4	Tons	4÷6	6÷7,5	7,5÷10	4÷6	6÷7,5	7,5÷10

LINKAGE SYSTEMS

7 Standard bolted plate

Naked plate for quick couplers





APPLICATIONS

- SHREDDING PRUNING RESIDUES IN ORCHARDS, VINEYARDS, ETC.
- GREEN MAINTENANCE
- SHREDDING STRAW, CORN STALKS OR OTHERS OPEN FIELD CROPS
- DITCHES AND DIKES CLEANING
- LAWN MOVING
- CLEANING OF WOODED AREAS
- LANDSCAPING

(D1)